

## Overview

The System KH5F consist of a Base-System with five horizontal aligned BENTAX® Ionization-Tubes. It can be mounted both outside with a mount-frame or inside in air-duct or Air Handling Unit (AHU). Different power-connection options are available.


Used for Air Cleaning, Air refreshing, Odor Elimination, Degradation of pollutants, Air sterilization, Air decontamination Installations in Air-conditioning systems (HVAC systems), air-conditioning and ventilation systems, and exhaust air-canals in industrial, office buildings, manufacturing facilities, wastewater treatment plants, waste air disposal

## Specifications

Supply Voltage	230 VAC ± 10% 50Hz 115 VAC ± 10% 60Hz
Nominal Power Rating	86 W
Air Treatment up to *	~ 5000 m³/h
Weight	9 kg

\* Depending on: Air Quality, VOC, VVOC, Air Change Rate

## Base Systems: KH5F

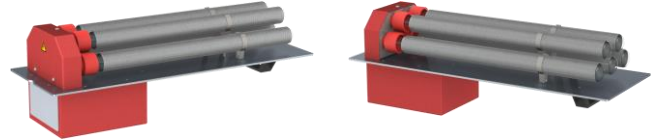

## Power Connection Option: KH5F-[y]z

<b>C1</b>		C14 Socket (IEC 60320-1) with illuminated switch, fuse-box and a C13 power-cord
<b>C1C</b>		fdgfd
<b>R</b>		


## Mount-Frame Option: KH5F-y[z]

<b>F</b>		Mounting Frame Set
----------	--	--------------------


## Order Number KH5F System Configuration

Type	Voltage	Order #
KH5F-C1	230	KH-05-A-C1
	115	KH-05-B-C1
KH5F-C1F	230	KH-05-A-C1F
	115	KH-05-B-C1CF
KH5F-C1C	230	KH-05-A-C1C
	115	KH-05-B-C1C
KH5F-C1CF	230	KH-05-A-C1CF
	115	KH-05-B-C1CF
KH5F-R	230	KH-05-A-R
	115	KH-05-B-R
KH5F-RF	230	KH-05-A-RF
	115	KH-05-B-RF

## Dimensions KD1D (mm)

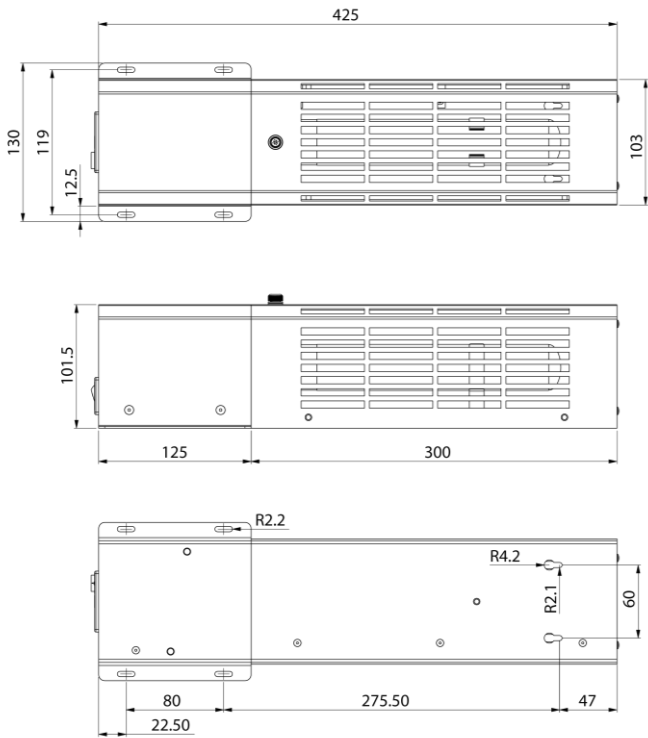

## Dimensions KD1E (mm)

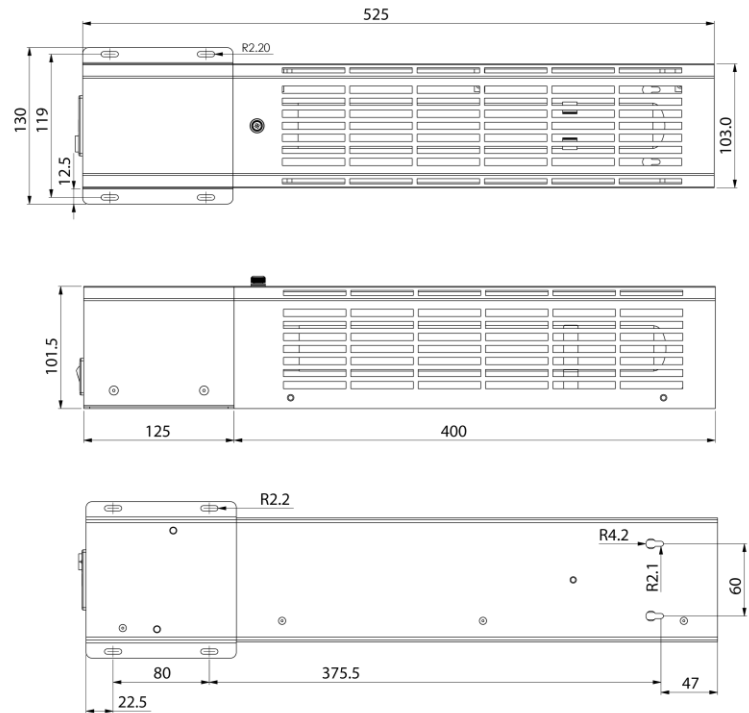

## Dimensions KD1F (mm)

